



## Cross-Layer Optimization of Multipoint Message Broadcast in MANETs

Nielsen, Jimmy Jessen; Grønbæk, Lars Jesper; Renier, Thibault Julien; Schwefel, Hans-Peter; Toftegaard, Thomas

*Published in:*

Wireless Communications and Networking Conference, 2009. IEEE WCNC 2009

*DOI (link to publication from Publisher):*

[10.1109/WCNC.2009.4917654](https://doi.org/10.1109/WCNC.2009.4917654)

*Publication date:*

2009

*Document Version*

Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*

Nielsen, J. J., Grønbæk, L. J., Renier, T. J., Schwefel, H-P., & Toftegaard, T. (2009). Cross-Layer Optimization of Multipoint Message Broadcast in MANETs. In *Wireless Communications and Networking Conference, 2009. IEEE WCNC 2009* IEEE. <https://doi.org/10.1109/WCNC.2009.4917654>

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

### Take down policy

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.

# Cross-Layer Optimization of Multipoint Message Broadcast in MANETs

Jimmy Nielsen, Jesper Grønbaek, Thibault Renier  
Dept. of Electronic Systems  
Aalborg University, 9220 Aalborg, Denmark  
{jnjn,ljg,tr}@es.aau.dk

Hans-Peter Schwefel  
AAU and ftw.  
1220 Wien, Austria  
hps@es.aau.dk

Thomas Toftegaard  
TietoEnator IP solutions  
8260 Viby J, Denmark  
thomas.toftegaard@tietoenator.com

**Abstract**—Multipoint-to-multipoint message broadcast is a demanding application scenario in ad-hoc networks. Adaptive management of wireless resources is necessary to support such applications in a safety critical context. In this work we study adaptation of transmission rate and power to varying densities of ad-hoc nodes. Our approach is to construct a cross-layer model building on existing models for physical and link layers. To enable optimization in relation to metrics of end-to-end delay and message reception probability a model of flooding broadcast is proposed as a part of the cross-layer model.

In a simulation study we show that adaptation of transmission power and rate can be necessary to achieve delay requirements and maximize message reception probability. Compared to simulation our cross-layer model based optimization approach generates slightly more conservative parameter settings. It is further shown how correlated losses have a significant impact on the robustness of the broadcast technique.

## I. INTRODUCTION

Adaptive management of wireless resources in ad-hoc scenarios is necessary to utilize the shared medium resources optimally under varying conditions caused by mobility and wireless channel properties. One of the more demanding application scenarios is multipoint-to-multipoint (mp-to-mp) broadcast. In a group of nodes, each node has messages to disseminate to all other nodes while receiving messages from all other nodes as well. This is a highly relevant scenario in car-to-car communication, where messages contain information about road conditions and abrupt changes in neighbour car movement (e.g. emergency braking)[1]. The information is used to increase traffic safety and improve traffic flow. Consisting of multiple sources periodically sending and forwarding messages, obviously, such communication scenarios have a potential to cause heavy contention in the wireless medium which may affect safety properties of the applications. To enable such safety critical applications, under varying conditions, we study distributed approaches to link adaptation in mobile nodes in IEEE 802.11 based vehicular networks. Two significant link adaptation parameters are transmission power (*tx power*) and transmission rate (*tx rate*). In ad-hoc networks, adaptation of such parameters to network conditions is mainly targeted at improving overall throughput and delay while reducing power consumption [2]. In *unicast settings*, tx power control is commonly applied to optimize single hop connections [3][4] as well as in routing and topology control [2][5] to ensure full and reliable network connectivity while

reducing collision domains and conserving energy. Power minimization has also been a studied topic in *broadcast settings*. In work of [6][7][8] approaches are made to minimize tx power of the individual nodes while maintaining broadcast coverage at the cost of transmissions in more hops. This approach yields a reduction in the number of nodes in transmission range and thereby a reduction in redundancy. It is however not thoroughly studied what impact the minimum power objective has on reliability when considering unreliable channels and cases where contention is high.

A dominant part of other work in optimization of broadcast performance focuses on efficient network layer broadcasting techniques to reduce number of forwarding transmissions, end-to-end delay and to increase coverage [9][10]. These techniques are typically based on assumptions of fixed transmission range and rate. A relevant option is to further improve the overall performance and reliability of such protocols by also considering adaptation of link and physical layer parameters.

In this work we study the potential of cross-layer optimization (CLO) of the mp-to-mp broadcasting. We consider possibilities of controlling layer parameters of *tx power* and *tx rate*. In contrast to a dominant part of existing work our focus is not to reduce power consumption, which is less critical in vehicular scenarios than in battery-driven sensor network scenarios. Instead our primary aim is to optimize performance and reliability metrics of *end-to-end message delivery delay* ( $D_{e2e}$ ) and *successful message delivery probability* ( $P_{smd}$ ) in relation to constraints set by QoS requirements from an application. This requires to analyze the following tradeoffs: I) High tx power increases the collision domain and amount of redundant nodes but may reduce end-to-end delays due to fewer hops to the network edge. II) High tx rate gives less contention (and delay), whereas employing more resilient modulation schemes (lower rates) increases transmission range without increasing the collision domain. Our cross-layer approach is based on an overall cross-layer model including a basic broadcast mechanism and existing models of fast fading channels and MAC.

The paper is organized as follows: Section II describes the model based optimization approach including the main cross-layer model and submodels based on existing work. In section III, the broadcast model is introduced and finally in section IV, optimization results are evaluated in a simulation study.

## II. OPTIMIZATION APPROACH AND SYSTEM MODELS

A stretch of highway represents the scenario in which optimal settings for *tx power* and *tx rate* are needed. We consider a static snapshot of the relative distances between cars where the width of the road is considered insignificant and the cars are in a straight line. For succeeding cars, the spacing is assumed to be equal, as depicted in fig. 1.

The applied optimization approach takes its starting point in a *broadcast source* node ( $S_o$ ), which broadcasts messages within a limited area (zone) defined by the application. It is assumed that in general the node farthest from  $S_o$ , the edge node, will experience the worst end-to-end delay and has the highest risk of not receiving a message. Thus, the optimization goal is defined to maximise  $P_{smd}$  and keep  $D_{e2e}$  within requirements for the edge node.

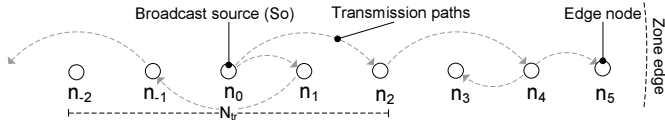


Figure 1. Positions and tx range ( $N_{tr}/2$ ) of broadcasting nodes in highway.

In the following a cross-layer model is presented that allows  $P_{smd}$  and  $D_{e2e}$  to be evaluated for the edge node, given *tx power*, *tx rate* and node density.

### A. Cross-Layer Model

The cross-layer model is built from sub-models covering individual functionalities in a TCP/IP protocol stack on top of IEEE 802.11b link and physical layers. These sub-models are developed as individual modules, to allow extension of selected model parts. The main model is presented in fig. 2. Grey boxes are sub-models representing protocol stack functionalities, where the remainder are equations of output metrics and intermediate variables. In the following we in-

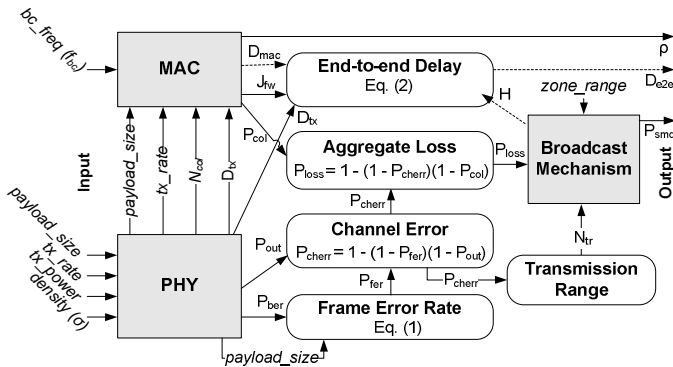


Figure 2. Components of the overall optimization model.

introduce the main parameters and equations of the model. In order to maintain an acceptable computational complexity, the variables and parameters that are passed between submodels and the output variables are scalars. For random variables the mean values are used.

The probability of a frame loss due to channel variations,  $P_{cherr}$ , is given in the *Channel Error* equation of fig. 2.  $P_{out}$  is the outage probability which describes the probability that the signal power in a receiving node drops below the receive threshold leading to a frame loss. Assuming independent bit errors, the frame error probability for a frame transmitted using the short preamble option for IEEE 802.11b [11] is:

$$P_{fer} = 1 - (1 - P_{eDBPSK})^{n_{pre}} \cdot (1 - P_{eDQPSK})^{n_{hdr}} \cdot (1 - P_{eMod})^{n_{frame}} \quad (1)$$

where  $P_{ex}$  is the BER of the used transmission scheme for different parts of the frame transmission and  $n_X$  are the number of bits in the preamble, header and MAC frame. Frame losses can also be caused by collisions represented by the collision probability  $P_{col}$ . Thus, the overall probability of a loss of a transmission  $P_{loss}$  is given from the *Aggregate Loss* equation, assuming independence of  $P_{col}$  and  $P_{cherr}$ .

The output metric  $P_{smd}$  is calculated from the broadcast model which is described in Section III. As input, the model needs  $P_{loss}$ , the transmission range  $N_{tr}$  and the zone range. Given the node density, the transmission range is defined as the mean amount of nodes reached by a transmission. We define the transmission range as the nodes where the probability of a successful reception in a free channel is  $\geq 0.5$ .

The end-to-end delay  $D_{e2e}$  is defined in terms of the number of hops  $H$ , and the delays that occur at each hop:

$$D_{e2e} = J_{fw}(H - 1) + (D_{mac} + D_{tx} + D_q)H \quad (2)$$

In (2) the forwarding jitter  $J_{fw}$  is the mean of a random delay, which is added to the scheduled transmission time in the flooding broadcast scheme to reduce the collision probability when *forwarding* a broadcast (see [9]).

The transmission delay  $D_{tx}$  depends on the PHY mode and the frame size and can easily be obtained from [11]. Deriving the MAC delay,  $D_{mac}$ , and link layer interface queueing delay  $D_q$ , however, requires more extensive modelling work to include influences from contention window size and the number of contending nodes. In this work a simple queueing based model approach has been applied to identify channel utilization and saturation points where  $D_{e2e}$  increases significantly. This model is described in section II-C. In the following the individual submodels are presented.

### B. PHY Model

The PHY model must provide the probabilities for avg. bit error  $P_{ber}$  and outage  $P_{out}$ . These are depending on the characteristics of the channel model. The wireless channel in the considered stretch of highway is characterized by a rural environment. The channel model considered in this work is based on the two-ray ground reflection model in conjunction with a Ricean [12] fast fading model. In a Ricean channel,  $P_{ber}$ , can be derived from the avg. bit error probability for an AWGN channel using eq. (6.50) in [13]. However, due to the computational complexity of  $P_{ber}$  for the CCK modulation schemes with tx rates of 5.5 and 11 Mbit/s, only the DBPSK and DQPSK with tx rates of 1 and 2 Mbit/s, respectively, have been implemented in the optimization model. The expression

used to calculate the bit error probability for DBPSK has been derived analytically and is given in terms of the Rice factor  $K$  and the SNR  $\frac{E_b}{N_0}$  in (3).

$$P_e = \frac{M}{2} \exp(K(M-1)), \text{ where } M = \frac{(1+K)}{(1+K) + \frac{E_b}{N_0}} \quad (3)$$

The bit error probability of PQPSK is obtained numerically. For Ricean fading  $P_{\text{out}}$  is obtained as described in eq. (6.46) [13].

The PHY model also provides  $N_{\text{col}}$ , which is the mean number of nodes that will obtain an SNR above the busy sensing threshold [11] in a transmission. Notice that  $N_{\text{col}} > N_{\text{tr}}$ .

### C. MAC Model

The MAC submodel mainly provides the collision probability  $P_{\text{col}}$  and the channel utilization  $\rho$ .

a) *Collision probability*: The calculation of  $P_{\text{col}}$  is given from equations (8),(11) and (12) in [14], which is based on the assumption that all nodes always have a packet ready for transmission. In the considered multipoint broadcasting application this is not necessarily the case and the outcome of the model may therefore be too pessimistic in these cases. It must be noted that we assume standard IEEE 802.11 MAC behaviour where in the case of layer 2 broadcasts, a fixed size contention window is used.

b) *Channel utilization*: In order to establish a basic approach for modelling  $D_q$  we consider a single server queueing system where  $\mu$  is the mean rate at which a node gains access to the medium,  $\lambda$  is composed of the arrival rate of broadcasts from the application layer and forwards from other nodes, and  $\rho = \frac{\lambda}{\mu}$  is the channel utilization. We may obtain  $\lambda = f_{\text{bc}}(1 + (N_{\text{zone}} - 1)P_{\text{smd}})$ , where  $f_{\text{bc}}$  is the broadcast frequency,  $N_{\text{zone}}$  is the number of nodes in the zone, and  $P_{\text{smd}}$  is the probability that a broadcast is received successfully by a node, which is then able to forward the broadcast. Further, the achievable medium access rate for each node is in the interval  $\frac{1}{D_{\text{tx}} \cdot N_{\text{col}}} \leq \mu \leq \frac{2}{D_{\text{tx}} \cdot N_{\text{col}}}$ , where  $D_{\text{tx}}$  is the transmission time of a frame including DIFS, and  $N_{\text{col}}$  is the number of nodes within busy sensing range. The time used for decrementing the contention window counter is omitted in  $\mu$  as it is considered negligible compared to  $D_{\text{tx}}$ . The upper bound of  $\mu$  results from the case when parallel transmissions (most likely leading to collisions though) occur in the considered one dimensional topology. In the following we will consider a heuristic estimate of  $\mu = \frac{3}{2 \cdot D_{\text{tx}} \cdot N_{\text{col}}}$ , as it is in the middle of the interval.

### III. FLOODING BROADCAST MODEL

The studied network layer broadcast protocol in this work is flooding broadcast where every node forwards each received unique message once. A high level of redundancy makes flooding broadcast robust to losses but also greedy in the use of channel resources. In existing work [9], flooding broadcast is considered a baseline for comparison while its basic principles make it useful in this initial model study. The outcome of the flooding broadcast model is a metric of  $P_{\text{smd}}$  for each node based on  $P_s = (1 - P_{\text{loss}})$  and the mean amount of nodes that

can receive a frame transmission. As a basis for the model construction the following assumptions have been made:

- (I) **Equal transmission probability**: The probability of a successful error-free reception,  $P_s$ , is considered to be the same for any node in the network.
- (II) **Independent reception probabilities**:  $P_s$  is assumed to be independent for each node.
- (III) **Time invariant  $P_s$  during BC**:  $P_s$  is assumed not to vary throughout the duration of a broadcast.

The flooding broadcast model consists of two parts. An *analytical* model for a fully connected network and an *empirical* model to include partially connected networks.

c) *Fully connected network model*: In a fully connected network (FCN) it is assumed that all nodes receive a transmission successfully with probability  $P_s$ . To derive  $P_{\text{smd}}$  the approach is to calculate the probability that all potential paths from a source node  $So$  to a sink node  $Si$  will fail. For a two node network this probability is obviously  $P_f(So \rightarrow Si) = 1 - P_s$ . When introducing more nodes, other intermediate paths exist between  $So$  and  $Si$ .  $M(i, j)$  is the probability that these intermediate paths will fail;  $i$  is the amount of nodes that have received a copy of the message and are ready to forward it.  $j$  is the amount of neighbour nodes in a set  $N$  (not including  $Si$ ) who have not received the message yet. Thus, for a network consisting of three nodes we have:

$$\begin{aligned} 1 - P_{\text{smd}} &= P_f(So \rightarrow Si)M(1, 1) \\ \text{where } M(1, 1) &= [(1 - P_s) + P_s(1 - P_s)] \end{aligned} \quad (4)$$

Figure 3 depicts two examples of how a transmission can evolve in a network of five nodes. In ( $\alpha$ ) only node  $a$  receives the first transmission. Subsequently, the transmission continues via nodes  $b$  and  $c$ .  $M(1, 2)$  is the probability that the transmission from  $a$  fails to reach  $Si$  directly or via  $b$  and  $c$ . Notice,  $So$  has already sent a copy of the message and does not transmit it further. In ( $\beta$ ) two nodes have received the first transmission and  $M(2, 1)$  expresses the probability that transmissions from  $a$  and  $c$  directly and via  $b$  will fail. In (5)  $M(1, 3)$  is given from expressions of  $M(1, 2)$  and  $M(2, 1)$ .

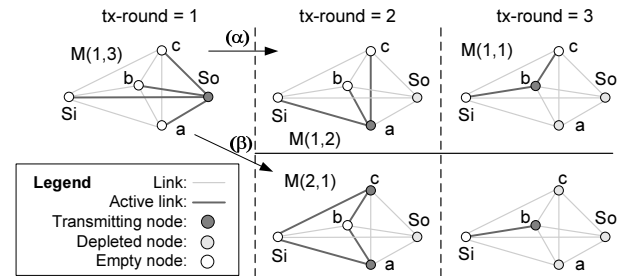


Figure 3. Two examples of broadcast progress in a fully connected network.

$$\begin{aligned} M(1, 3) &= \binom{3}{0} P_s^0 (1 - P_s)^3 + \binom{3}{1} P_s^1 (1 - P_s)^3 M(1, 2) \\ &\quad + \binom{3}{2} P_s^2 (1 - P_s)^3 M(2, 1) + \binom{3}{3} P_s^3 (1 - P_s)^3 \end{aligned} \quad (5)$$

Recognising the recursive elements of (5), an expression for  $M(i, j)$  can be defined for any  $i, j \in N$ :

$$M(i, j) = \begin{cases} 1 & \text{for } i = 0, j > 0 \\ 1 & \text{for } i > 0, j = 0, \quad i, j \in N \\ g(i, j) & \text{otherwise} \end{cases}$$

$$g(i, j) = \sum_{q=0}^j \binom{j}{q} (1 - P_s)^q [1 - (1 - P_s)^i]^q \cdot [(1 - P_s)^i]^{j-q} M(q, j - q) \quad (6)$$

Finally from (7)  $P_{\text{smd}}$  can be calculated for any number of nodes in a FCN that corresponds to the assumptions initially presented in this section.

$$P_{\text{smd}} = 1 - P_f(S_o \rightarrow S_i) M(1, j) = 1 - (1 - P_s) M(1, j)$$

where  $j = \text{number of nodes in } N$  (7)

A simulation of flooding broadcast in an FCN has been implemented in MATLAB in compliance with assumptions I-III. A comparison of the results from simulation to the model verifies that the model accurately provides  $P_{\text{smd}}$  for varying  $P_s$  and node size of the FCN.

d) *Partially connected network model*: The FCN model must be extended to cover more realistic settings of partially connected networks (PCN) where not all nodes are in reach of each other.

The case of PCN is increasingly complex to model in a similar manner as in the fully connected case. First of all the probability  $P_{\text{smd}}$  has to be established individually for each node. In addition, a broadcast can evolve in many different ways. As an example, fig. 1 depicts a broadcast for a transmission radius of 2 nodes. Essentially, a message may propagate in either direction in relation to the source. As a result a large amount of transmission paths exist between any two nodes. Exact analysis as conducted in the FCN model, thus, becomes intractable.

The alternative option considered for the PCN model is to introduce an empirical approach. The empirical model is partially based on the FCN model and simulation. The message reception conditions in the area around the source node,  $S_o$ , within a radius of  $N_{tr}/2$  have a good resemblance to the FCN model. Thus, the FCN model is a useful approximation of  $P_{\text{smd}}$  to this range of nodes, which is denoted the *So neighbourhood*. To include behaviour outside the *So neighbourhood* a MATLAB based simulation model of the broadcast mechanism has been implemented. The simulation evaluates transmissions in rounds similar to fig. 3 to obtain  $P_{\text{smd}}$  for individual nodes. Since the conditions for the simulation are fairly basic little effort is required to generate results with a high sample count for permutations of transmission range and  $P_s$ . To represent results from simulation in a compact form the progress of  $P_{\text{smd}}$  outside the *Si neighbourhood* has been fitted to a polynomial function of third degree,  $P_{\text{smd}} = f(x), x = [1, \dots, N]$  where  $N$  is the zone edge node. As a result only four parameters need to be stored for each permutation of  $R$  and  $P_s$  making

it suitable for implementation with limited requirements for storage.

The PCN model has been implemented in an ns-2 environment with the *simple MAC* component adapted to include loss behaviour corresponding to the assumptions I-III (controllable  $P_s$ ). The comparison between simulation and model is depicted in fig. 4, which shows a very good correlation between the model and simulation results. The empirical model is generated with a step size in  $P_s$  of 0.01. The model has been created from an assumption that the stretch of nodes is infinitely long. In a realistic setting a node close to the edge of a network will have fewer forwarding neighbours resulting in a little lower  $P_{\text{smd}}$  than the model predicts as seen in fig. 4.

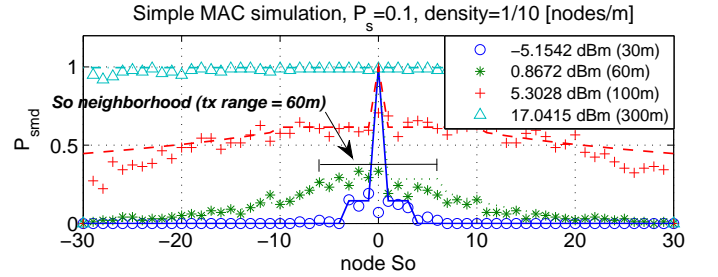


Figure 4. Broadcast model (lines) vs. simple MAC simulation (markers).

The broadcast model assumptions have been revisited from initial results obtained from a detailed ns-2 simulation environment, as described in section IV. It has been seen that (I) seems to be a reasonable assumption for most nodes. Also, as density and transmission requirements of nodes do not change significantly during a broadcast, assumption (III) also seems valid. In many cases  $P_{loss}$  is influenced by collisions meaning that many losses, in contrast to assumption (II), are correlated. This impact of this is analysed and discussed further in the following section.

#### IV. RESULTS AND DISCUSSION

This section presents a comparison of output from the cross-layer model and reference data based on simulation runs from a detailed ns-2 simulation setup. Extensions [15] have been added to ns-2 v. 2.29 for correct IEEE 802.11 MAC behaviour and bit-error probabilities in a Ricean channel. A scenario is studied where nodes are placed in equidistant locations as shown in fig. 1 at a stretch of 1000 m. Broadcasts are evaluated from an  $S_o$  node at  $\sim 500$  m to the two edge nodes within a zone range of 300 m. The broadcast message size is 30 bytes and application requirements are  $D_{e2e} = 160$  ms and  $P_{\text{smd}} = 99\%$ . Further details of the simulation environment can be found in [16].

Model and simulation results are compared for different configurations in terms of *density* ( $\sigma$ ) and *broadcast frequency* ( $f_{bc}$ ) for different settings of *tx rate* and *tx power*. We will use the notation  $(tx \text{ rate}, \frac{1}{\sigma}, f_{bc})$  to for each considered case in which we vary the *tx power*. For simplicity, tx powers are in the following converted to approximated tx ranges using a two-ray PHY model. The simulation is for practical reasons

evaluated at a coarse resolution while more evaluation points are used for the model. In the following we initially study the effects of varying *tx power* for a single case, and secondly we evaluate the overall performance of the optimization scheme for a selection of cases.

Fig. 5 (A) depicts a comparison for simulation and model of  $P_s$  and  $P_{\text{smd}}$  for varying *tx power* at a fixed density  $\sigma = \frac{1}{30} \frac{\text{nodes}}{m}$ . In general  $P_s$  decreases as *tx power* is increased due to an increasing amount of collisions. The model estimate is a little lower than the simulation. This is likely an effect of the simplifying assumptions used to obtain  $P_{\text{col}}$ . For increasing *tx power*,  $P_{\text{smd}}$  also increases as more nodes are reached by a transmission. The increased robustness from more nodes, in the considered case, also means that a nearly constant level of  $P_{\text{smd}}$  is obtained despite the decrease in  $P_s$ . For the model  $P_{\text{smd}}$  converges to 1, whereas, the simulation  $P_{\text{smd}}$  converges to  $\sim 0.6$ . The main cause of this difference is found in assumption (II). That is, in contrast to independent reception probabilities in the model, many losses are correlated due to collisions in reality. As a result there is a significant risk of multiple nodes simultaneously failing to receive a transmission. The convergence point of  $P_{\text{smd}}$  therefore primarily depends on the probability that the initial broadcast from the *So* node is not received successfully by any neighbor nodes. This is likely to occur in the presence of correlated collisions. If an *So* broadcast is received by just a few nodes, the redundancy of flooding practically ensures coverage. This vulnerability of the initial broadcast makes the flooding broadcast scheme less robust than the model suggests. Despite this difference, the model and simulation results have interesting similarities. Tab. I contains ranges of optimal  $P_{\text{smd}}^{\text{mod}}$ , which we for the

the longest tx ranges of 300 m, whereas in the high contention cases ( $\sigma = \frac{1}{20} \frac{\text{nodes}}{m}$ ),  $P_{\text{smd}}$  drops before reaching ranges of 300 m. In these cases, the addition of nodes for longer transmission ranges does not compensate the corresponding drop in  $P_s$ . From the simulation results we further see that except for the cases (1, 40, 10) and (2, 20, 10), the range of optimal points covers a wide range. This suggests, as indicated in fig. 5 (A), that within some range of the highest values of  $P_{\text{smd}}$ , the sensitivity to variation of *tx power* is low. The simulation results in tab. I further show that in

Setting <i>tx rate</i> , $\frac{1}{\sigma}$ , $f_{\text{bc}}$	Model		Simulation	
	opt [m]	$P_{\text{smd}}^{\text{mod}}$	opt [m]	$P_{\text{smd}}^{\text{sim}}$
(1, 40, 10)	> <b>170</b>	0.9981	<b>300</b>	0.70( $\pm 0.08$ )
(2, 40, 10)	> <b>170</b>	0.9981	<b>150, 300</b>	0.88( $\pm 0.06$ )
(2, 30, 10)	> <b>160</b>	0.9969	100.. <b>300</b>	0.65( $\pm 0.10$ )
(2, 20, 5)	<b>150</b> ..270	0.9920	<b>70</b> ..200	0.60( $\pm 0.08$ )
(1, 20, 10)	<b>150</b> ..270	0.9920	100, <b>200</b>	0.20( $\pm 0.08$ )
(2, 20, 10)	<b>150</b> ..270	0.9920	<b>150</b>	0.44( $\pm 0.10$ )

Table I  
TX RANGE FOR OPTIMAL  $P_{\text{smd}}$  FOR SIMULATION AND MODEL.

low contention cases, a higher *tx rate* generally leads to a higher  $P_{\text{smd}}$ . This can be explained by the fact that hidden nodes have less time to cause collisions with shorter frame transmission time. A similar effect is not seen in the model as the MAC submodel does not consider hidden nodes to derive  $P_{\text{col}}$ . In the following we evaluate the channel utilization model. However, since the  $P_{\text{smd}}$  model does not take correlated collisions into account, we compensate our model and use  $\lambda = f_{\text{bc}}(1 + (N_{\text{zone}} - 1)P_{\text{smd}}P_{\text{col}})$ .

Fig. 5 (B) shows how  $D_{\text{e2e}}^{\text{sim}}$  increases due to an increasing level of contention as *tx power* increases. In this case, the  $D_{\text{e2e}}^{\text{sim}} < 160 \text{ ms}$  requirement is exceeded in the interval 150 – 200 m where the network saturates, causing queue instability. The channel utilization model estimates the saturation point ( $\rho \sim 1$ ) at 190 m. Revisiting the discussion regarding hidden nodes in section II-C, the results show that the considered estimate of  $\mu$  seems reasonable.

Fig. 6 show optimal *tx power* and actual  $P_{\text{smd}}$  and  $D_{\text{e2e}}$  for all cases, considering 3 *tx power* selection schemes. 'default' is a fixed default setting of 60 mW used in the PRISM 802.11b chipset, also modelled in ns-2. Using this scheme, the  $D_{\text{e2e}}^{\text{sim}} < 160 \text{ ms}$  requirement is exceeded in most cases except when contention is low in (2, 40, 10). Clearly, this fixed default *tx power* is unsuitable for the considered mp-to-mp broadcast. Turning attention to optimization options, two schemes are considered: 'model' uses the presented models for estimating  $P_{\text{smd}}$  and  $\rho$ , and 'simulation' is based on  $P_{\text{smd}}$  and  $D_{\text{e2e}}$  from simulation results alone.

In terms of optimization, we first consider the *tx rate* in relation to the tradeoff II between lower contention and higher robustness mentioned in sec. I. The results for (x, 40, 10) and (x, 20, 10) clearly show that increasing *tx rate* leads to improved  $P_{\text{smd}}$ , whereas lower *tx rate*, i.e. more robust modulation scheme, is not beneficial. This is a consequence of collisions and not fading being the main cause of losses.

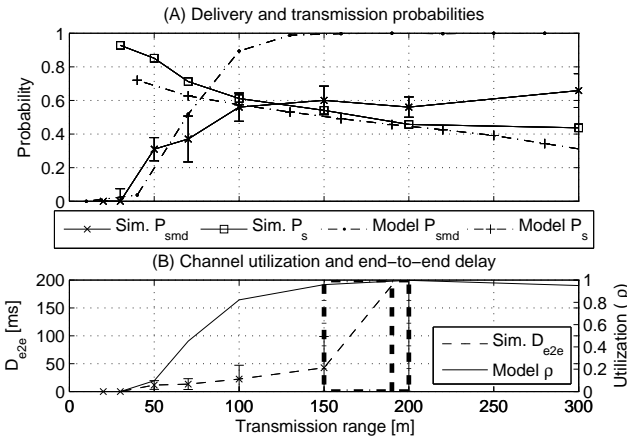


Figure 5. Model vs. simulation for varying tx ranges for  $\sigma = \frac{1}{30} \frac{\text{nodes}}{m}$

model define as the range of points that are within 0.01 of the maximum  $P_{\text{smd}}^{\text{mod}}$ , and for the simulation as the mean values that overlap the confidence bounds of the maximum mean  $P_{\text{smd}}^{\text{sim}}$ . The values typeset in bold denote the points that are considered the optimal choices, when only considering the  $P_{\text{smd}}$ . For both the model and simulation it can be seen that when contention is low ( $\sigma < \frac{1}{20} \frac{\text{nodes}}{m}$ ), the optimal range extends to

Focusing the analysis on optimization of  $tx$  power, we first study the baseline results achieved from 'simulation' in fig. 6. The optimal tx power varies between approximately  $1 - 10 mW$ , which clearly shows the need for tx power adaptation to ensure maximisation of  $P_{smd}$  within the delay requirements. To establish the capabilities of the cross-layer model to provide optimal results, we consider the results for 'model'. In all cases except  $(1, 40, 10)$ , the obtained  $P_{smd}$  values are similar for model and simulation and  $D_{e2e}$  is well below the limit in all cases. Overall, this shows that the proposed model is in most cases suited for determining tx power settings that lead to practically optimal  $P_{smd}$ .

The exception here is  $(1, 40, 10)$  where a lower  $P_{smd}$  is obtained due to the channel utilization model being slightly conservative. Interesting is also the case  $(2, 20, 5)$ , where similar  $P_{smd}$  values are obtained for very different tx powers. In the simulation result in tab. I, the optimal range spans from  $70 - 200 m$ , meaning that the selection of tx power within this range mainly influences  $D_{e2e}$ , which is also clear from fig. 6.

Considering the results in tab. I, we see that the optimal range of the simulation results, except  $(1, 40, 10)$  and  $(2, 20, 10)$ , include the  $150 m$  tx range. This indicates that a simple optimization scheme having a default tx range of  $\sim 150 m$  combined with a channel utilization model to prevent saturation, would yield acceptable results in most cases. However, model improvements and further studies of cases for other tx rates and densities are needed to determine if a  $P_{smd}$  model does give a significant benefit. Finally, this aspect should be considered for other broadcasting schemes that are needed anyway in order to satisfy the  $P_{smd}$  requirements.

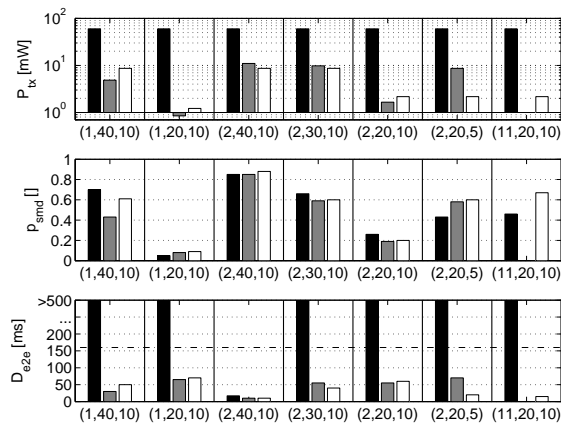


Figure 6. Tx power,  $P_{smd}$  and  $D_{e2e}$  for different configurations. Bars represent: 'default' (black), 'model' (dark gray), 'model+simulation' (light gray), and 'simulation' (white). Notice: No  $11 \frac{Mbit}{s}$  support in model.

## V. CONCLUSION AND FUTURE WORK

This work has considered a model-based cross-layer optimization of PHY layer parameters  $tx$  rate and  $tx$  power to reduce end-to-end delay and increase the successful message reception probability in a broadcast setup. It is shown that tx power adaptation is needed to reduce contention for varying densities but may have a less significance in low contention

scenarios. Our proposed flooding broadcast model assumes independent losses, however, it is shown that correlated losses due to collisions impact message reception probabilities greatly; even in low contention scenarios. Finally, a heuristic channel utilization model for estimating network saturation has been proposed. Altogether, our studies have shown good correlation between results of ns-2 based simulations and the cross-layer model.

Clearly, flooding broadcast is a simple but inefficient broadcasting scheme. In practice, other broadcasting schemes, e.g. AHBP [9] should be considered in future work. Also, in the considered cases, simulation and model results have indicated that a good choice of transmission range is  $\sim 150 m$ . Additional work is needed to determine if this result can be generalized, particularly in relation to other broadcasting schemes.

**Acknowledgments:** This research was partially supported by 'ftw.' and the EU IST FP6 project 'HIDENETS' and the EU IST FP7 project 'WHERE'.

## REFERENCES

- [1] M. Radmirsch and et al., *D1.1: Use case scenarios and preliminary reference model*. <http://www.hiddenets.aau.dk/>: Highly DEpendable ip-based NETworks and Services – HIDENETS, 2006.
- [2] M. Krunz and A. Lee, "Transmission power control in wireless ad hoc networks: challenges, solutions and open issues," *Network, IEEE*, vol. 18, no. 5, pp. 8–14, 2004.
- [3] L. Wang, K. Yen, J. Huang, A. Chen, and C. Chang, "Cross-layer performance analysis of joint rate and power adaptation schemes with multiple-user contention in Nakagami fading channels," *Proceedings of the 2006 international conference on Wireless communications and mobile computing*, pp. 881–886, 2006.
- [4] E. Jung and N. Vaidya, "A Power Control MAC Protocol for Ad Hoc Networks," *Wireless Networks*, vol. 11, no. 1, pp. 55–66, 2005.
- [5] J. Wu and F. Dai, "Mobility-Sensitive Topology Control in Mobile Ad Hoc Networks," *IEEE TRANSACTIONS ON PARALLEL AND DISTRIBUTED SYSTEMS*, pp. 522–535, 2006.
- [6] J. Wieselthier, G. Nguyen, and A. Ephremides, "On the construction of energy-efficient broadcast and multicasts in wireless networks," *INFOCOM 2000. Nineteenth Annual Joint Conference of the IEEE Computer and Communications Societies. Proc. IEEE*, vol. 2, 2000.
- [7] P. Wan, G. Călinescu, X. Li, and O. Frieder, "Minimum-Energy Broadcasting in Static Ad Hoc Wireless Networks," *Wireless Networks*, vol. 8, no. 6, pp. 607–617, 2002.
- [8] X. Chen, M. Faloutsos, and S. Krishnamurthy, "Power adaptive broadcasting with local information in ad hoc networks," *IEEE ICNP*, 2003.
- [9] B. Williams and T. Camp, "Comparison of broadcasting techniques for mobile ad hoc networks," *Proc. of the 3rd ACM international symposium on Mobile ad hoc networking & computing*, pp. 194–205, 2002.
- [10] Y. Liu and H. Schwefel, "Algorithms for Efficient Broadcasting in Wireless Multi-hop Networks," *Proceedings of IEEE Globecom*, 2006.
- [11] "Wireless lan medium access control (mac) and physical layer (phy) specifications," *IEEE Std 802.11-2007 (Revision of IEEE Std 802.11-1999)*, pp. C1–1184, 12 2007.
- [12] R. Prasad, *Universal Wireless Personal Communications*. Artech House, Inc. Norwood, MA, USA, 1998.
- [13] A. Goldsmith, *Wireless Communications*. Cambridge University Press, 2005, ISBN 0521837162.
- [14] G. Bianchi, "Performance analysis of the IEEE 802.11 distributed coordination function," *Selected Areas in Communications, IEEE Journal on*, vol. 18, no. 3, pp. 535–547, 2000.
- [15] M. Fiore, "Ieee 802.11 patch for ns-2 v. 2.29," 2006. [Online]. Available: <http://www.tlc-networks.polito.it/fiore/>
- [16] J. Nielsen and J. Grønbaek, "Cross-layer optimization of message broadcast in manets," Aalborg University, Tech. Rep., June 2007. [Online]. Available: [http://projekter.aau.dk/projekter/research/crosslayer\\_optimization\\_of\\_message\\_broadcast\\_in\\_manets\(10324745\)/](http://projekter.aau.dk/projekter/research/crosslayer_optimization_of_message_broadcast_in_manets(10324745)/)